



PRESENTS

metaFLEX^{PRO} S H E A R

3-HOUR WALL FIRE BARRIER

**3-HOUR
FIRE RATING**
PER UL 2079
& ASTM E1966

**SIGNIFICANTLY
LESS BULKY THAN
CONVENTIONAL DESIGNS**

**TESTED FOR FIRE
EXPOSURE FROM
EITHER SIDE OF WALL**

EASY TO INSTALL

- SINGLE PACKAGE
- PRE-PUNCHED FOR ANCHORS
- QUICK MALE/FEMALE SPLICING
- NO CAULK REQUIRED

**6"-18"
MAX OPEN**

**UP TO ±100%
SEISMIC MOVEMENT**
PER ASTM E1399

Joint cover not shown for clarity

BALCO.US/MPSW3H

Balco, Inc. Wichita, Kansas 67219 316.945.9328 | 800.767.0082 balcousa.com
Balco, the logos and other trademarks are property of Balco, Inc., its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. Balco, Inc. reserves the right to change specifications without prior notice.
©2024 Balco, Inc. All rights reserved. B50167-0923



IN COMPARISON:



PRODUCT FEATURES	BALCO 3HR METAFLEX PRO SHEAR WALL 6-18" (MAX OPEN)	COMPETITOR
SINGLE PACKAGE	✓	✓
RANGE OF MOVEMENT	UP TO ±100%	UP TO ±50%
INSULATION THICKNESS	2.5"	4.5"
MINIMUM CLOSE	4"	8"
UP TO 3-HOUR FIRE RATING	✓	✓
TESTED AND LISTED FOR FIRE AND SMOKE EXPOSURE FROM EITHER SIDE OF THE WALL*	✓	
MINIMUM COVER PLATE REQUIREMENT**	1/8"-THICK ALUMINUM	1/4"-THICK ALUMINUM

*Always check product listing to ensure product provides fire-rating from both sides of the wall.

**Most interior wall expansion joint covers are 1/8" thick. Pairing these covers with a fire barrier that requires a 1/4" thick cover will not provide a fire-rated assembly.

Competitive performance is based on publicly available information. Accuracy should be verified by the reader.

OTHER FIRE BARRIERS IN THE METAFLEX PRO FAMILY:

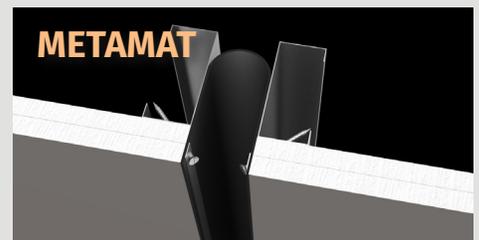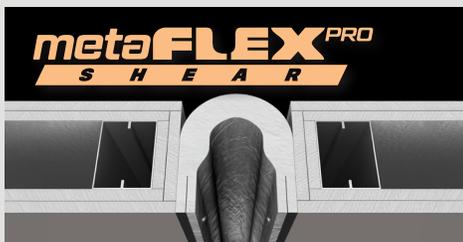

SEE MORE AT BALCO.US/MPSW